

AC ELECTRICAL DRIVE TRAINER

EM-68280Q

EDU-LABS



The EDU-LABS EM-68280Q system consists of a series of modular slot-in panels modules housed in a compact epoxy coated casing. Each modules represents one or more electrical / electronic components or on block diagram of a complex circuits. All functional parts of the components are mounted inside the modules with circuit symbols/mimic diagrams screen printed on the front PCB panel and terminated at 4mm safety sockets for student experimental practice.

The machines are basically industrial models, self protect kind, with coupling half-joint, especially equipped to be suitable for student training in laboratory. For this purpose the winding ends are connected to 4 mm safety socket in a metal housing on top of which a clear synoptic diagrams as educational terminal board. The student can easily understand operation and winding connection. Also most of accessories and instruments designed in Panel System A4 high in standard.

All modular slot-in panels modules are inter connecting together by using 19mm short circuit shunt and / or 4mm stackable safety test leads sets to form the desired control circuits.

EXPERIMENTS MODULE

THREE PHASE SQUIRREL CAGE MOTOR EM-30-02-01



- Nominal Power: 350W (1/2HP)
- Nominal Voltage: 690V / 450V (Delta/Star)
- Nominal Current: 1.50A / 1.80A (Delta/Star)
- Nominal Speed: 3000 rpm
- Frequency: 50Hz
- Cooling Method: Self Cooling
- Terminals: 4mm Safety Socket
- Base Plate: Attachable To Break Load Unit

THREE PHASE SLIP RING MOTOR EM-30-02-02



- Nominal Power: 350W (1/2HP)
- Nominal Voltage: 240 / 415V (Delta/Star)
- Nominal Current: 4.5 / 4.0A (Delta/Star)
- Nominal Speed: 1500 rpm.
- Frequency: 50Hz
- Cooling Method: Self Cooling
- Terminals: 4mm Safety Socket
- Base Plate: Attachable To Break Load Unit

THREE PHASE SYNCHRONOUS MACHINE EM-30-03-02



- Nominal Power: 350W (1/2HP)
- Nominal Voltage: 240 / 415 V (Delta/Star)
- Nominal Current: 1.85 / 2.85 A (Delta/Star)
- Nominal Speed: 3000 rpm
- Frequency: 50 Hz
- Excitation Voltage: 0 ~ 110 VDC
- Excitation Current: 0.25 A
- Winding Poles: 2
- Cooling Method: Self Cooling
- Terminals: 4mm Safety Socket
- Base Plate: Attachable To Break Load Unit

SINGLE PHASE INDUCTION MOTOR EM-30-04-03



- Nominal Power: 350W (1/2HP)
- Nominal Voltage: 240VAC
- Nominal Current: 2.5A
- Nominal Speed: 1500rpm
- Frequency: 50Hz
- Power Factor: 0.78
- Winding Poles: 4
- Terminals: 4mm Safety Socket
- Base Plate: Attachable To Break Load Unit

THREE PHASE AC GENERATOR BRAKE EM-30-06-07



- Nominal Power: 750W (1HP)
- Nominal Voltage: 415AC
- Nominal Current: 2.5A
- Nominal Speed: 1500 rpm.
- Frequency: 50 Hz
- Excitation: Permanent Magnet
- Cooling Method: Self Cooling
- Terminals: 4mm Safety Socket
- Base Plate: Attachable To Motor Unit

AC/DC GENERATOR BRAKE CONTROLLER EM-30-06-06



- Modular design
- Suitable for all type of AC and DC Generator Brake up to 2HP
- Measurement Range: 0% to 100%
- Protection: Fuse
- Unit Type : Panel H2

AC VARIABLE FREQUENCY INVERTER EM-30-14-02



- Type: 1.5KW (2 HP)
- Power Supply: Three phase 415V, 50Hz
- Power Terminals: R, S, T terminals
- Inverter Output: U, V, W
- Braking Resistor Terminals: P & B
- Panel Control Start/Stop, FWD and REV
- Terminal Control Start/Stop, FWD and REV
- Signal Input: 0-10V
- Digital Input: S1 to S5
- Analog Output: 4-20mA & AO
- Relay Output: RA, RB, RC
- Terminals : 4mm Safety Sockets

UNIVERSAL AC/DC MOTOR EM-30-04-05



- Nominal Power: 350W (AC/DC)
- Nominal Voltage: 240 V (AC/DC)
- Nominal Current: 3.0 A
- Nominal Speed: 3000 rpm.
- Frequency: 50 Hz
- Terminals: 4mm Safety Socket
- Base Plate: Attachable To Break Load Unit
- Coupling: EM-21-CS

THREE PHASE POWER QUALITY METER EM-30-13-16



- Display Type: HD LCD Display
- Real-Time Measurement
 - Phase voltage: V1, V2, V3, Vlnavg Line voltage: V12, V23, V31, Vllavg
 - Current: I1, I2, I3, Iavg, In
 - Active power: per phase and total active power
 - Reactive power: per phase and total reactive power
 - Apparent power: per phase and total apparent power
 - Power factor: per phase and total power factor
 - Total frequency
- Energy And Demand
 - Four quadrant active energy: Import, Export, Total, Net
 - Four quadrant reactive energy: Import, Export, Total, Net
 - Active, Reactive, Apparent demand

- Power Quality Analysis
 - Voltage unbalance Current unbalance
 - Voltage THD (Total harmonic distortion), Odd-even harmonic distortion
 - Voltage individual harmonics, Crest factor
 - Current THD, Odd-even harmonic distortion
 - Current individual harmonics, K factor
- Communication
 - Ethernet 10/100M network port
 - RS485 communication port
 - MODBUS RTU communication protocol
- Trend Logging
 - Phase voltage Line voltage Current
 - Active power Reactive power Apparent power
 - Power factor Frequency Three-phase unbalance
 - Active energy Reactive energy Apparent energy
 - Phase
- Settable Logging Interval
 - Logging from 1min to 60min, interval settable
- Software Accessibility
 - 4 Tariffs (DataLog) Sharp, peak, flat, valley in different season and schedule (TOU)
 - Accuracy: $\pm 0.5\%$
 - Protection: Fuse
 - Power Supply: AC240VAC, 50Hz
 - Terminals: 4mm Safety Socket

POWER MANAGEMENT SOFTWARE EM-30-13-16-PMS

Time	V1	V2	V3	Vln	I1	I2	I3	Iavg	W	Q	S	PF	F
2010-01-01 00:00:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:01:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:02:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:03:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:04:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:05:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:06:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:07:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:08:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:09:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:10:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:11:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:12:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:13:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:14:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:15:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:16:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:17:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:18:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:19:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:20:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:21:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:22:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:23:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:24:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:25:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:26:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:27:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:28:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:29:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:30:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:31:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:32:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:33:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:34:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:35:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:36:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:37:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:38:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:39:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:40:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:41:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:42:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:43:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:44:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:45:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:46:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:47:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:48:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:49:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:50:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:51:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:52:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:53:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:54:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:55:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:56:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:57:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:58:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 00:59:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0
2010-01-01 01:00:00	220.0	220.0	220.0	220.0	1.0	1.0	1.0	1.0	0.0	0.0	0.0	1.0	50.0

- PC management software; web browse data
- True-RMS measuring parameters
- ANSI and IEC 0.2 accuracy class
- Power quality analysis
- 4 quadrant energy
- Data logging
- Measure individual harmonics from 2nd to 49th
- TOU, 4 Tariffs, 6 Seasons, 6 Schedules

TORQUE SENSOR MODULE EM-30-06-18




- Motor direct coupling design
- Sensor Type: Noncontact rotation torque transducer
- Max. torque: $\pm 10\text{Nm}$
- Max Rotation speed: 12000rpm
- Torque Output: Frequency
- Speed Output: Frequency
- Connection: Shaft and Coupling

TORQUE METER MODULE EM-30-06-19



- Input: 240VAC, 50Hz 1-Phase
- Unit Type: Panel H2
- Torque range: -99999-99999 N.m.
- Torque display: 0-99999N.m
- Speed display: 0-99999
- Power consumption: 0-99999
- Standard transmitter output: Optoelectronic isolation
- Two 4mA~20mA DC current output, Output resolution ratio: 1/4000; error less than $\pm 0.2\%$, F.S, loading capacity: less than 600 Ω
- Serial communication port as standard configuration
- RS232 default setting or RS485 optional

TORQUE MANAGEMENT SOFTWARE EM-30-06-20

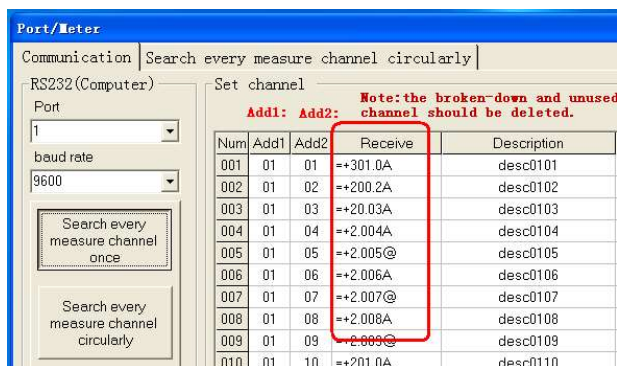

- PC management software
- Data collection the measured data by computer serial port
- Display and save the real-time data
- Transform the saved data to TXT, EXCEL file
- By curve analyses, curve print, trend browse, report generation, report edition and report print, etc.

DIGITAL RPM METER WITH SPEED SENSOR EM-30-13-11



- Modular design
- Display: 5 Digits
- Measurement Range: 0-99999 rpm
- Accuracy: $\pm 0.1\% \pm 1$ Digit
- Power source : 240VAC, 50Hz
- Unit Type : Panel H1
- Terminals: 4mm Safety Sockets
- Speed Sensor: Inductive Type

**DIGITAL AC VOLTMETER
EM-30-13-03**



- Measurement range : AC 0 ~ 600V
- Display : 3 ½ digits 14.2 mm LED
- Accuracy : $\pm 0.2\% \pm 1$ digit
- Resolution : 1V
- Input impedance : $1M\Omega$
- Power source : 220Vac, 50/60 Hz
- Unit Type : Panel H1
- Terminals: 4mm Safety Sockets (Color Coded)

**DIGITAL AC AMMETER
EM-30-13-04**



- Measurement range : AC 0 ~ 5A
- Display : 3 ½ digits 14.2 mm LED
- Accuracy : $\pm 0.3\% \pm 1$ digit
- Resolution : 0.01 A
- Input impedance : $< 0.1\Omega$
- Power source : 220Vac, 50/60 Hz
- Unit Type : Panel H1
- Terminals: 4mm Safety Sockets (Color Coded)

**UNIVERSAL AC/DC POWER SUPPLY
EM-30-09-02-01**



- Power Input Requirement: Three Phase 240V/415V, 50Hz
- Connection: 3P+N+PE Output terminations by using 4mm terminals socket.
- Input fed with AC 5 pin plug 32A AC Plug and Socket.

- Pilot lamps provided to indicate all live supplies.
- With On/Off Switch
- Fuse Protection.
- Fixed Single Phase AC Power Supply: 3 x 240V AC; 8A AC (Phase To Neutral; R-N, B-N, Y-N)
- Fixed Three Phase AC Power Supply: 3 x 450V AC; 8A AC (Phase To Phase; R-Y, Y-B, B-R)
- Adjustable Single Phase & Three Phase AC / DC Power Supply (Simultaneously):
 - 3 x 0 ~ 450VAC; 8A AC (Phase To Phase)
 - 3 x 0 ~ 240V AC; 8A AC (Phase To Neutral)
 - 1 x 0 ~ 450VDC; 8A DC (DC Output)
- Three Phase 5 Pin AC Plug 32A with 1.5m length 5 core power cable.

**STAR DELTA STARTING SWITCH MODULE
EM-30-10-01**



- Modular design
- Switch load: 400VAC/15A
- Switch positions: 0-1-2 (0-Y-Δ)
- Terminals : 4 mm safety sockets

**FORWARD REVERSING SWITCH MODULE
EM-30-10-02**



- Modular Design
- Switch Load: 400VAC/15A
- Switch positions: FORWARD-OFF-REVERSE
- Unit Type : Panel H1
- Terminals: 4mm Safety Sockets (Color Coded)

**THREE PHASE POWER SUPPLY MODULE
EM-10-09-01**



- Modular Design
- Power Input: 3 Phase 240V/415V, 50Hz via input 5 core cable with 5 pin AC Plug, 32A.
- Connection: 3P+N+PE.
- Protection: Earth leakage circuit breaker and miniature circuit breaker
- Complete with START and STOP Push Button
- Three Pole ON/OFF Selector Switch.
- Unit Type : Panel H1
- Terminals: 4mm Safety Sockets (Color Coded)

**SELECTOR SWITCH MODULE
EM-10-05-02**



- Modular Design
- Switch 1: 4 Pole Selector Switch
 - L1, L2, L3 and N
 - Switch Load: 415Vac, 10A
- Switch 2: 2 Way Selector Switch
 - Way 1: Normally Close (NC)
 - Way 2: Normally Open (NO)
 - Switch Load: 240Vac, 5A
- Switch 2: Key Switch
 - Way 1: Normally Close (NC)
 - Way 2: Normally Open (NO)
 - Switch Load: 240Vac, 5A
- Unit Type : Panel H1
- Terminals: 4mm Safety Sockets (Color Coded)

**CIRCUIT BREAKER (3 POLES) MODULE
EM-10-01-01**



- Modular Design
- Connection: 3P+N+PE
- Three Pole Circuit Breaker
- Switch Load: 10A
- Unit Type : Panel H1
- Terminals: 4mm Safety Sockets (Color Coded)

**CURRENT LIMIT PROTECTION MODULE
EM-10-04-01 (3 UNITS)**



- Modular Design
- Connection: 3P+N+PE.
- Switch Load: 415Vac, 10A
- Current Setting Range: 4 ~ 6.3A (Adjustable Current Limiting)
- Complete with START and STOP Push Button
- Unit Type : Panel H1
- Terminals: 4mm Safety Sockets (Color Coded)

**PILOT LAMP MODULE
EM-10-10-01**



- Modular Design
- 4 Units Pilot Lamp (Color: Red, Yellow, Blue & Green)
- Unit Type : Panel H1
- Terminals: 4mm Safety Socket

**TIMER MODULE
EM-10-07-01**



- Modular Design
- Supply Voltage : 240VAC, 50Hz
- Time Range : 30 Sec
- Contact Rating : 240VAC, 5A
- Timer : 2 Units
- Timer 1 : Contact 1 (NCx1, NOx1); Contact 2 (NCx1, NOx1)
- Timer 2 : Contact 1 (NCx1, NOx1); Contact 2 (NCx1, NOx1)
- Unit Type : Panel H1
- Terminals: 4mm Safety Sockets

PUSH BUTTON SWITCH MODULE (I)
EM-10-08-01



- Modular Design
- Push Button Switch 1 (NCx1, NOx1)
- Push Button Switch 2 (NCx1, NOx1)
- Push Button Switch 3 (NCx2)
- Push Button Switch 4 (NOx2)
- Unit Type : Panel H1
- Terminals: 4mm Safety Socket

MAGNETIC CONTACTOR MODULE
EM-10-03-01 (3 UNITS)



- Modular Design
- 3 Pole Magnetic Contactor
- Auxiliary Switch (NCx2, NOx2)
- Unit Type : Panel H1
- Terminals: 4mm Safety Socket

POWER DRIVE (SOFT STARTERS MODULE)
EM-30-10-10



- Modular design
- Modular Design
- Connection: TP+N
- Soft Starter: 2 Phase-Controlled 3 ϕ , 415V
- Power Rating: 3HP, 4.8 A , $U_c=110-230V$ AC/DC
- Unit Type : Panel H1
- Terminals: 4mm Safety Socket

COUPLING HUB, NYLON SLEEVE & SAFETY GUARD EM-30-15-03



- Application: Motor & Generator
- Coupling Sleeve For Mechanical Connection Of Two Electrical Machines.

**TACHOMETER
EM-30-11-07**



- Range: 5 to 99,999 RPM
- Resolution:
- 0.1RPM <1000RPM
- 1RPM>1000RPM
- Display: 5 Digits, 10mm (0.4")LCD
- Accuracy: $\pm 0.05\% + 1$ Digits
- Photo Detection Distance: 50 to 150mm
- Battery: 1.5V AA x 4 pcs
- Memory: Last Value, Max. Value, Min. Value
- Size: 190 x 72 x 37 mm

**CONNECTING SAFETY TEST LEAD SET
EM-30-15-03**



- The set consists of 2 type lead set and 2 type bridging plug set in 5 different coded colors and lengths chosen to allow the realization of all experiment manual.
- Leads are capable of 15A current safety plugs.
- Safety Terminal Socket (4mm): 25cm x 15 units; 50cm x 20 units; 100cm x 15 units
- 19mm Bridging Plug Set x 10 units
- 19mm Bridging Plug Set (Stackable) x 10 units

**AC/DC VARIABLE POWER SUPPLY
EM-30-09-04-01**



- Power Input Requirement: Single Phase 240VAC, 50Hz
- Connection: 3 Pin Power Cord (UK Type)

- On/Off Switch With Indicator
- Fuse Protection.
- Fixed Single Phase AC Power Supply: 240VAC, 50Hz (Channel 1)
- Adjustable Single Phase AC/DC Power Supply (Simultaneously) :
 - 0 ~ 250VAC, 0 ~ 5A AC (Channel 2) Complete With AC Voltmeter & AC Ammeter
 - 0 ~ 250VDC, 0 ~ 5A DC (Channel 3) Complete With DC Voltmeter & DC Ammeter

**COMPUTER DESKTOP SYSTEM
EM-30-13-16-PC (OPTIONAL)**



- Operating system: Windows 10 Home 64
- Processor speed: 2.41 GHz
- Processor: Intel® Celeron® J1800 with Intel HD Graphics (2.41 GHz, 1 MB cache, 2 cores)
- Hard drive description: 500 GB 7200 rpm SATA
- Keyboard: USB wired Windows 8 keyboard
- Pointing device: USB wired optical mouse
- Network interface: Integrated Ethernet 10/100 BASE-T

**ADJUSTABLE FLAT SCREEN MONITOR HOLDER
EM-30-13-16-MTH (OPTIONAL)**



- Weight Up To 10kg
- Triple arms for full motion and added support
- Great for corners
- Folds flat to the wall
- Easy slide on installation
- Safety locking screw
- Cushioned pads for PC Monitor protection and improved audio

**EXPERIMENTAL TABLE
EM-30-16-01-02**



- 5' Standard Desktop
- Dimension:
- Length : 1500mm
- Width : 800mm
- Height : 850mm

**EXPERIMENT PANEL FRAME
EM-30-16-02-02**



- Din Standard A4 With Two Shelves
- Side Frame: T Shape
- Dimension:
- Length : 1450mm
- Width : 20mm
- Height : 300mm

Note: Due to products continuous development process, layout and specification may change without prior notices.